

Certifications

Approved by ENEDIS

Section

MV Multifunction

ApplicationField
Laboratory**PRODUCT BENEFITS**

Tuning of the pitch of the tool
 Embedded wear pad to protect the tool from the contact with the outer sheath
 For thick insulation

TOOL CAPACITY

Diameter	16 - 58 mm 0,630 - 2,283 inch
Pelable semicon thickness capacity	0.4 - 1.5 mm
Insulation thickness capacity	11 mm
Stylus included	SRC

TOOL DIMENSIONS

Length	305 mm
Width	115 mm
Height	165 mm
Weight without box	1,75 Kg
Packaging	Box



NEWCONSTRUCTION@WECSRENEWABLES.COM

PHONE: 760.251.0040 X2667

MAIL - P.O. BOX 580278, N. PALM SPRINGS, CA 92258-0278

PHYSICAL - 19392 RUPPERT STREET, PALM SPRINGS, CA 92263

WECSRENEWABLES.COM

Multifunction tool for outer sheath, peelable semiconductor and thick insulation

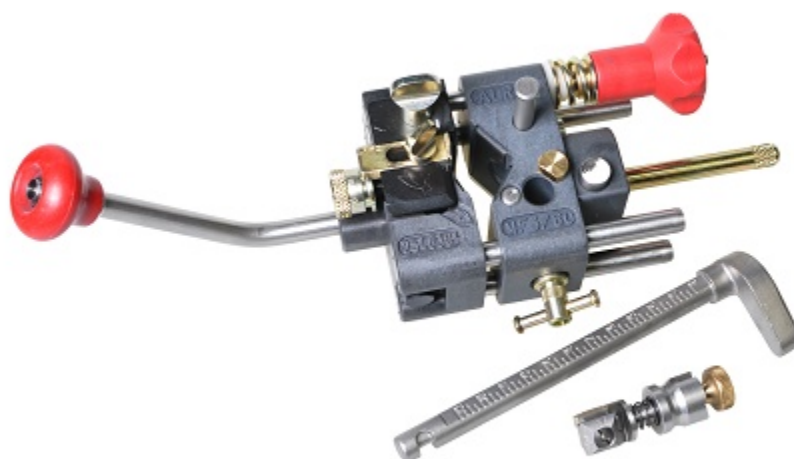
TO DO WHAT

The MF3/60-SRC tools enables the user to :

Remove the outer sheath (PE-PVC-PR) with a straight and neat cut

Score the peelable semiconductor with a chamfer on the edge of the semiconductor cutback (with the SRC scoring stylus delivered with the tool)

Set the length to be removed and remove thicker insulation with a straight and neat cut

**Options**

SCH - Chamfering stylus for insulation

SR - Scoring stylus for peelable semiconductor

Spare part

KIT-MF3/40 - Protective wear pads

LMF2-S - Spare blade for outer sheath and thick insulation

BR - Thrust to set the length of insulation to be remove

VBB1 - Screw for locking the thrust

PCR - Quick set up right angled 45° handle

196855 - Straight handle M10

108098 - Clamping knob for blade

SRC - Scoring stylus for peelable semiconductor with chamfer

LS-C - Spare blade for peelable semiconductor with chamfer

Associated tool

ALROC-FENTE - Tool to perform slits on cable's outer sheath

ROTO-TMG - Connector holder for bolted and clamping connections

DSP - Peelable semiconductor lifter

C-SR - Wrench to replace the semiconductor blade



Part Number	Diameter	Tool capacity			Dimensions			Packaging
		Pelable semicon thickness capacity	Insulation thickness capacity	Stylus included	Length	Width	Height	
MF3/40	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-C	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-SR	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-SRC	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-SSR	16 - 40 mm 0,630 - 1,575 in	Option	7 mm	None	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/60	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-C	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-SR	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-SRC	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	box
MF3/60-SSR	16 - 58 mm 0,630 - 2,283 in	Option	7 mm	None	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none