



SPECIAL FEATURES: NONE

(6) ϕ .875 [22.2] HOLES
EQUALLY SPACED AT 60°
ON ϕ 9.250 [235.0] B.C.

.750 [19.1]
LOWER
TERMINAL

2.000-12UM-2A
3.250 [82.6]
USABLE THREAD
SILVER PLATED

AIR OIL
END END

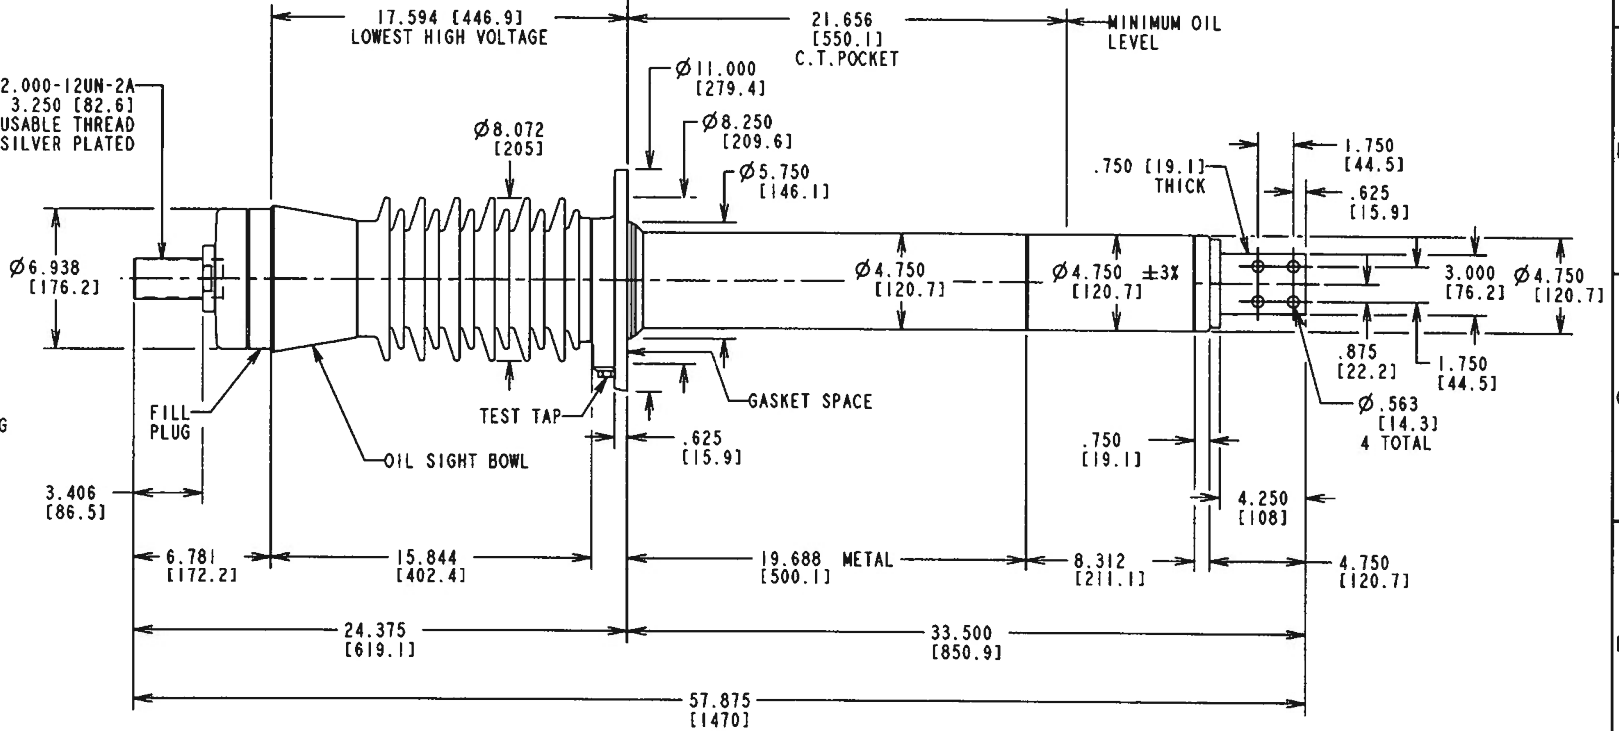

THIS OUTLINE REPLACES TIZUA034030-AAASMBBXX

| STYLE NUMBER | OUTER INSULATING ENVELOPE COLOR | INSULATION CLASS kV | BASIC IMPULSE LEVEL kV | MAX. LINE TO GROUND VOLTAGE kV | CONNECTION METHOD AND CONTINUOUS CURRENT A @ 60Hz | | | CREEP DISTANCE in. / [mm] | | MINIMUM ARCING DISTANCE in. / [mm] | MAXIMUM ALTITUDE ft / [m] | MOUNTING ANGLE FROM VERTICAL deg | APPROX. WEIGHT lb / [kg] |
|--------------|---------------------------------|---------------------|------------------------|--------------------------------|---|-------------|-----|---------------------------|---------|------------------------------------|---------------------------|----------------------------------|--------------------------|
| | | | | | DRAW-LEAD | INBOARD END | | NOMINAL | MINIMUM | | | | |
| 034Z3000AS | GRAY | 34.5 | 200 | 22 | N/A | 3000 | N/A | 41.590 | 39.810 | 15.844 | 10000 | 0 TO 45 | 140 |
| 034Y3000AS | BROWN | | | | | | | [1056] | [1011] | | | | |

| NO. & LOC. | REVISIONS |
|------------|--|
| 1 | NEW ISSUE PERKINS 05/17/07 |
| 2 | WT. WAS 140. PERKINS 11/11/08 POLLARO 11/11/08 |
| 3 | -ACTIVE- NEW VERSION, AND SIGHT BOWL DIMENSIONS REVISED. W.A. SHRINER 3-30-09 D. POLLARO 4/01/09 |

PRINTS TO:

| | | |
|---|----|----|
| 1 | 7 | 13 |
| 2 | 8 | 14 |
| 3 | 9 | 15 |
| 4 | 10 | 16 |
| 5 | 11 | 17 |
| 6 | 12 | 18 |

TITLE:

TYPE O Plus C II™ IEEE, CONDENSER BUSHING

RESP. DEPT.: BUSHINGS

DFT: PERKINS 11-Nov-08

CHKD: 11-Nov-08

REF:

APPD: POLLARO 11-Nov-08

UNITS = in./[mm]

SCALE = 0.219

DRAWING NO:

T034Z3000AS

LANG. = ENGLISH

REV.: 3

SHEET 1 OF 1

WE RESERVE ALL RIGHTS IN THIS DOCUMENT AND IN THE INFORMATION CONTAINED THEREIN. REPRODUCTION, USE OR DISCLOSURE TO THIRD PARTIES WITHOUT EXPRESS AUTHORITY IS STRICTLY FORBIDDEN. © ABB.