


WE RESERVE ALL RIGHTS IN THIS DOCUMENT AND IN THE INFORMATION CONTAINED THEREIN. REPRODUCTION, USE OR DISCLOSURE TO THIRD PARTIES WITHOUT EXPRESS AUTHORITY IS STRICTLY FORBIDDEN. © ABB.

PRINTED DATE: October 18, 2016

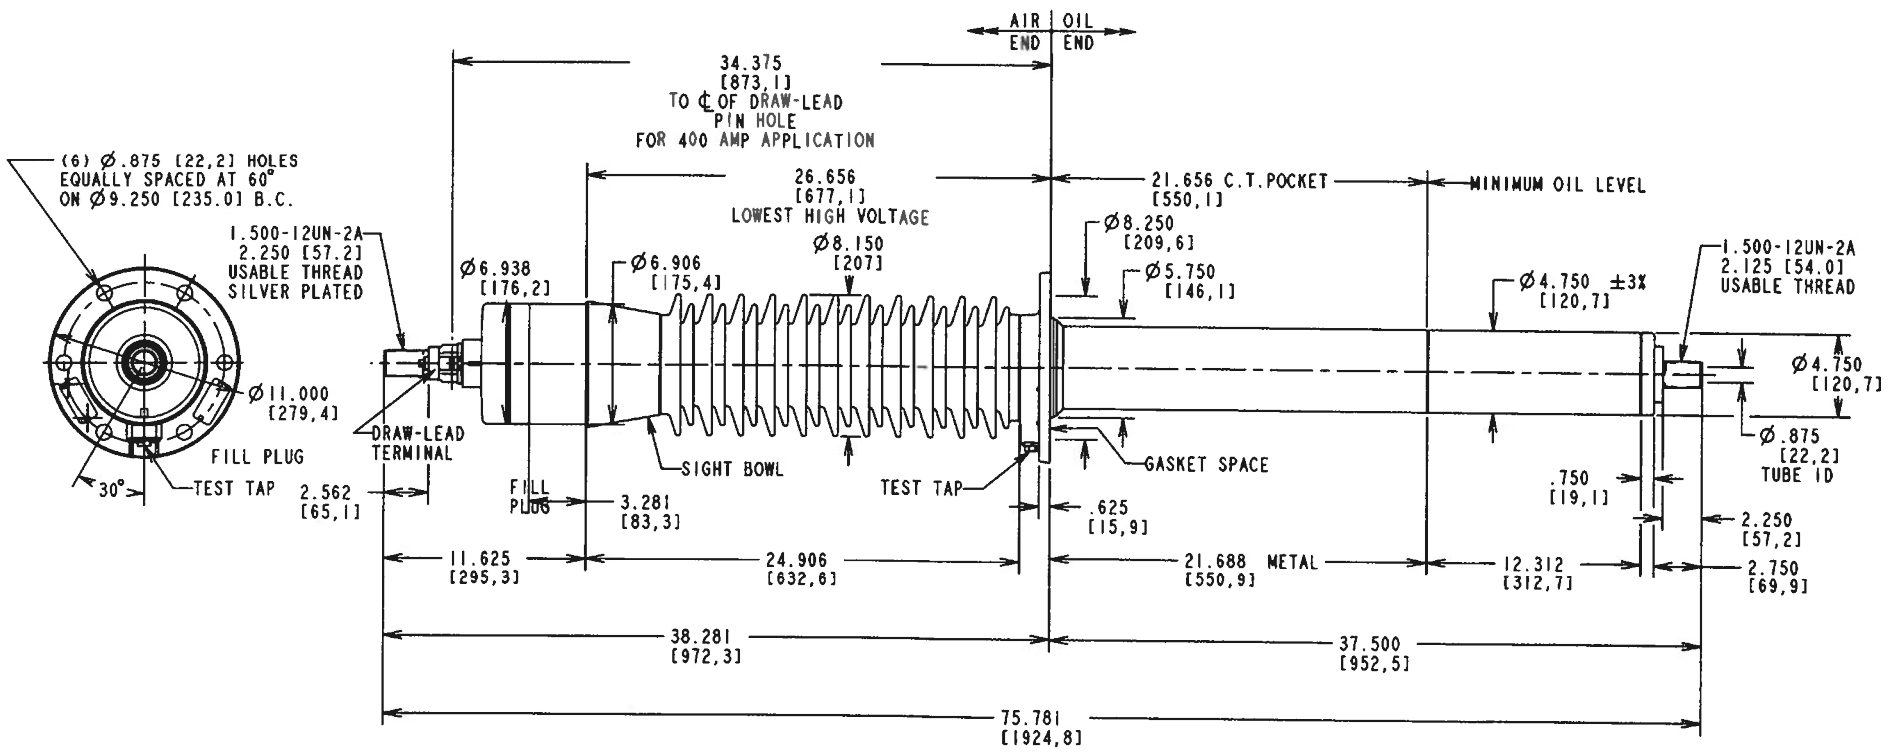

STYLE NUMBER	OUTER INSULATING ENVELOPE COLOR	INSULATION CLASS kV	BASIC IMPULSE LEVEL kV	MAX. LINE TO GROUND VOLTAGE kV	CONNECTION METHOD AND CONTINUOUS CURRENT A @ 60Hz		CREEP DISTANCE in. / [mm]		MINIMUM ARCING DISTANCE in. / [mm]	MAXIMUM ALTITUDE ft / [m]	MOUNTING ANGLE FROM VERTICAL deg	APPROX. WEIGHT lb / [kg]	
					DRAW-LEAD	INBOARD END	NOMINAL	MINIMUM					
069Z0412AN	GRAY	69	350	44	400	1200	1200	75.670 [1922]	72.280 [1836]	24.906 [633]	10000 [3048]	0 TO 60	140 [63.5]
069Y0412AN	BROWN												

NO. & LOC.	REVISIONS
1	NEW ISSUE. PERKINS 05/06/08
2	ADDED ADDITIONAL NAMEPLATE IN PLAN VIEW. PERKINS 07/24/08 WILLIAMS 07/24/08
3	Ø6.906 WAS Ø5.906. PERKINS 01/12/09 POLLARO 01/12/09

PRINTS TO:			TITLE:		RESP. DEPT.:	DFTR:	APPD:	LANG. = ENGLISH	DRAWING NO:
1	7	13	TYPE O Plus C II, IEEE, CONDENSER BUSHING						
2	8	14							
3	9	15							
4	10	16							
5	11	17							
6	12	18							
REF:									



T069Z0412AN

REV.: 3 SHEET 1 OF 1